

BAN3000.01




VHF + DAB Heavy Duty Dipole

174÷230 MHz

Type	BAN3000.01
ELECTRICAL	
Frequency	174 ÷ 230 MHz
Impedance	50 Ω unbalanced
V.S.W.R. (R.L)	< 1.2 (-20.6 dB)
Gain	2.0 dBd
HPBW H-pattern	± 105°
HPBW V-pattern	± 36°
Polarization	Vertical
Max power	See Below Table
Input connector	7/16 (f) din , 7/8"EIA
Lightning Protection	DC grounded
MECHANICAL	
Connector material	Nickel plated Brass
External parts material	Passivated Stainless Steel
Internal lines material	Passivated Aluminum
Insulators material	Virgin PTFE
Brackets and Hardware material	Stainless Steel
Pressurization	no
Environment Protection	U.V. resistant A.B.S. Radome
Survival wind velocity	240 km/h
Wind load at 160 km/h Frontal	75 N
Wind load at 160 km/h Lateral	115 N
Dimensions	89 x 78 x 6 cm
Weight (incl. Brackets)	7.0 kg
Mounting System	See Below



RADIATION PATTERN

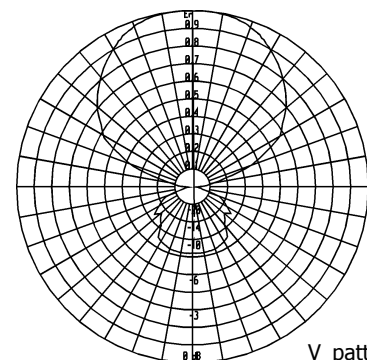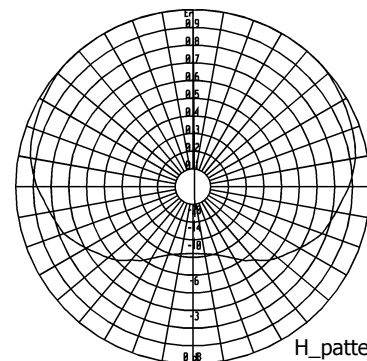

Pole Mount Ø 60÷114 mm

Ordering Information

p/n	Input Connector	Max Power
BAN3000.01.01	7/16 (f)	2.0 kW
BAN3000.01.02	7/8" EIA	3.5 kW