

# BAN4000


## UHF Four Dipoles Panel

470 ÷ 860 MHz




Type	BAN4000
<b>ELECTRICAL</b>	
Frequency	470 ÷ 860 MHz
Impedance	50 Ω unbalanced
V.S.W.R. (R.L)	< 1.1 (-26.4 dB)
Gain	11.5 dBd
HPBW H-pattern	± 30°
HPBW V-pattern	± 11.5°
Polarization	Horizontal
Max power	See Below Table
Input connector	7/16 (f) din , 7/8"EIA
Lightning Protection	DC grounded
<b>MECHANICAL</b>	
Connector material	Nickel plated Brass
Radiating Elements and back Plane	Passivated Stainless Steel
Internal lines material	Passivated Aluminum
Insulators material	Virgin PTFE
Brackets and Hardware material*	Hot dip galvanised Steel
Pressurization	yes
Environment Protection	U.V. resistant Fiberglass Radome
Survival wind velocity	240 km/h
Wind load at 160 km/h Frontal	890 N
Wind load at 160 km/h Lateral	400 N
Dimensions	100 x 52 x 25 cm
Weight	15.0 kg
Mounting System	See Below

### RADIATION PATTERN

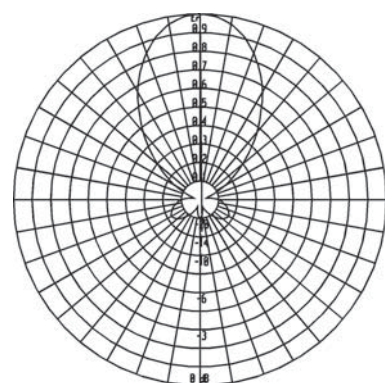


H\_pattern

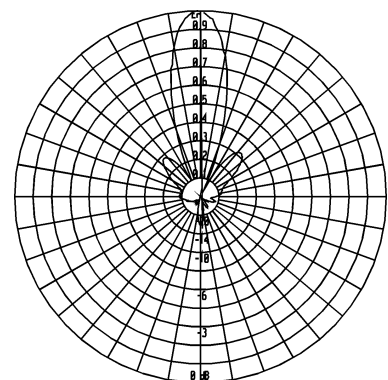

V\_pattern

\* Order separately



Tower Mount trough #4 M8 Treads  
Pole mount available upon request

### Ordering Information

p/n	Input Connector	Max Power
BAN4000.01	7/16 (f)	1.5 kW
BAN4000.02	7/8" EIA	2.5 kW